


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 135.04 lm/W
MODEL	200W 110DU	Imax(cd)	12935	S/MH(C0/180)	1.41	
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.35	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	27008	η UP,DN(C0-180)	0.0,50.5	
NOMINAL FLUX(lm)	27000	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220.1	η down(%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

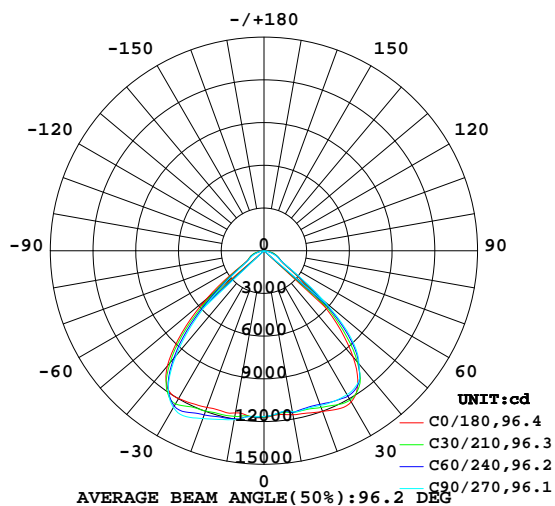

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

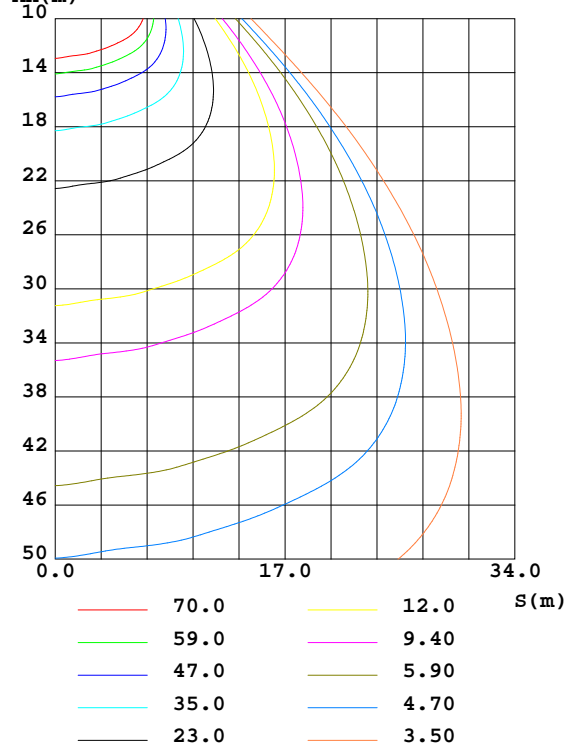

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1169	1151	1147	1141	1156	1192	1204	1188	0- 10	1107	1107	4.1,4.1
20	1201	1159	1156	1143	1171	1210	1254	1234	10- 20	3339	4446	16.5,16.5
30	1225	1193	1167	1163	1198	1259	1272	1257	20- 30	5599	10045	37.2,37.2
40	972.3	1020	1038	1066	1056	1012	960.7	951.4	30- 40	7160	17205	63.7,63.7
50	434.9	497.1	549.8	570.7	528.2	444.8	378.4	397.0	40- 50	5835	23040	85.3,85.3
60	131.6	138.6	130.2	133.8	131.7	127.4	123.2	131.7	50- 60	2217	25257	93.5,93.5
70	89.57	86.86	72.47	85.90	89.25	85.27	71.65	89.22	60- 70	1069	26326	97.5,97.5
80	35.47	23.75	11.59	24.01	34.93	23.33	11.19	25.57	70- 80	589.1	26915	99.7,99.7
90	0.3524	0.5836	3.202	0.6299	0.4274	0.8136	3.469	0.6486	80- 90	93.19	27008	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 20523 lm

%lum = 76.0%

%lamp = 76.0%

Conical surface Flux(120deg): 25257 lm

%lum = 93.5%


%lamp = 93.5%

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

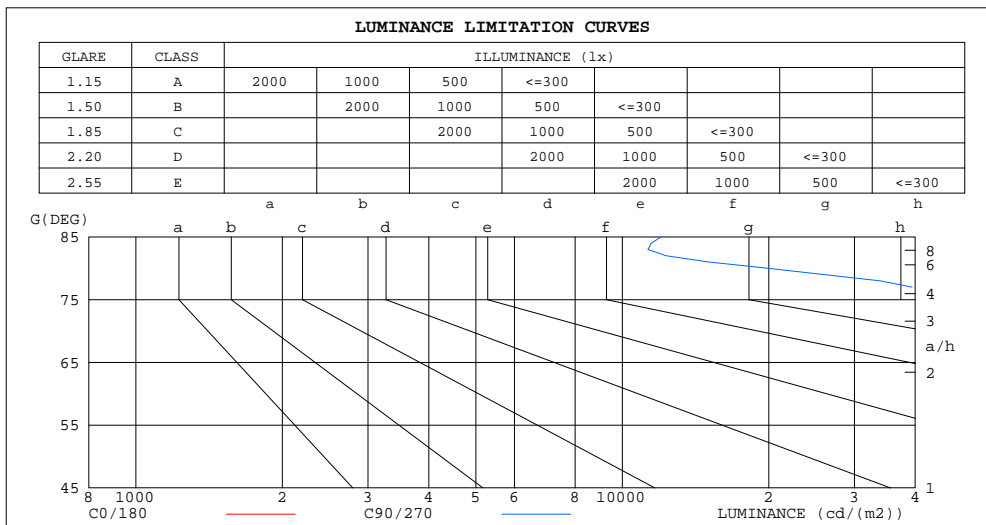

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	56270	12027
80	60792	19859
75	73496	49904
70	77944	63060
65	77625	73713
60	78312	77525
55	104618	126566
50	201353	254556
45	304055	362973

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.238	.135	.043	.231	.132	.042	.218	.125	.040	.206	.119	.038	.195	.113	.037		
2.0	.231	.127	.039	.225	.124	.038	.214	.119	.037	.204	.114	.036	.194	.110	.035		
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.196	.107	.033	.188	.104	.032		
4.0	.208	.108	.032	.204	.107	.031	.195	.103	.031	.187	.100	.030	.180	.098	.030		
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.171	.092	.028		
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026		
7.0	.176	.087	.025	.173	.086	.025	.167	.084	.024	.161	.082	.024	.156	.081	.024		
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022		
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.146	.073	.021	.141	.072	.021		
10.0	.150	.072	.020	.148	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.020		

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.175	.157	.140	.150	.135	.121	.103	.093	.083	.059	.054	.048	.019	.017	.016		
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.064	.056	.046	.037	.018	.015	.012		
3.0	.155	.114	.081	.133	.098	.071	.091	.068	.050	.053	.040	.029	.017	.013	.010		
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008		
5.0	.139	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006		
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005		
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004		
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004		
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003		
10.0	.111	.059	.024	.096	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED light					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:21cm*16cm					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					18.3	19.6	18.5	19.8	20.0	18.7	20.0	18.9	20.2	20.4
3H					18.6	19.8	18.9	20.0	20.2	18.8	20.0	19.1	20.2	20.4
4H					18.8	19.9	19.1	20.1	20.4	18.8	20.0	19.1	20.2	20.4
6H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.1	20.4
8H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.0	20.3
12H					18.9	19.9	19.3	20.2	20.5	18.7	19.7	19.0	20.0	20.2
4H 2H					18.3	19.4	18.6	19.6	19.9	18.6	19.7	18.9	20.0	20.2
3H					18.7	19.7	19.1	20.0	20.3	18.9	19.8	19.2	20.1	20.4
4H					19.1	19.9	19.4	20.2	20.6	19.0	19.9	19.3	20.2	20.5
6H					19.3	20.1	19.7	20.4	20.8	19.0	19.7	19.4	20.1	20.4
8H					19.4	20.1	19.8	20.5	20.8	18.9	19.6	19.3	20.0	20.4
12H					19.4	20.1	19.8	20.5	20.8	18.9	19.5	19.3	19.9	20.3
8H 4H					19.1	19.8	19.5	20.2	20.5	19.0	19.7	19.4	20.1	20.4
6H					19.4	20.0	19.9	20.4	20.8	19.0	19.6	19.4	20.0	20.4
8H					19.5	20.1	20.0	20.5	20.9	19.0	19.5	19.4	19.9	20.4
12H					19.6	20.1	20.1	20.5	21.0	18.9	19.4	19.4	19.8	20.3
12H 4H					19.0	19.7	19.5	20.1	20.5	19.0	19.6	19.4	20.0	20.4
6H					19.4	19.9	19.9	20.3	20.8	19.0	19.5	19.4	19.9	20.4
8H					19.5	20.0	20.0	20.4	20.9	19.0	19.4	19.4	19.8	20.3
Variations with the observer position at spacings:														
S = 1.0H					+ 1.4 / - 1.9					+ 1.9 / - 2.6				
1.5H					+ 1.1 / - 2.1					+ 1.2 / - 3.0				
2.0H					+ 3.2 / - 2.0					+ 4.0 / - 3.3				

CIE Pub.117, 27000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 11.5)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	69	59	53	68	59	53	67	58	53	48
0.80	79	69	63	78	69	63	76	68	63	57
1.00	86	78	72	85	77	72	83	78	71	66
1.25	93	85	79	91	84	79	89	83	78	72
1.50	97	89	84	95	89	84	93	87	83	77
2.00	102	96	91	100	95	90	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	85
3.00	107	102	98	105	101	97	102	98	95	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	104	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

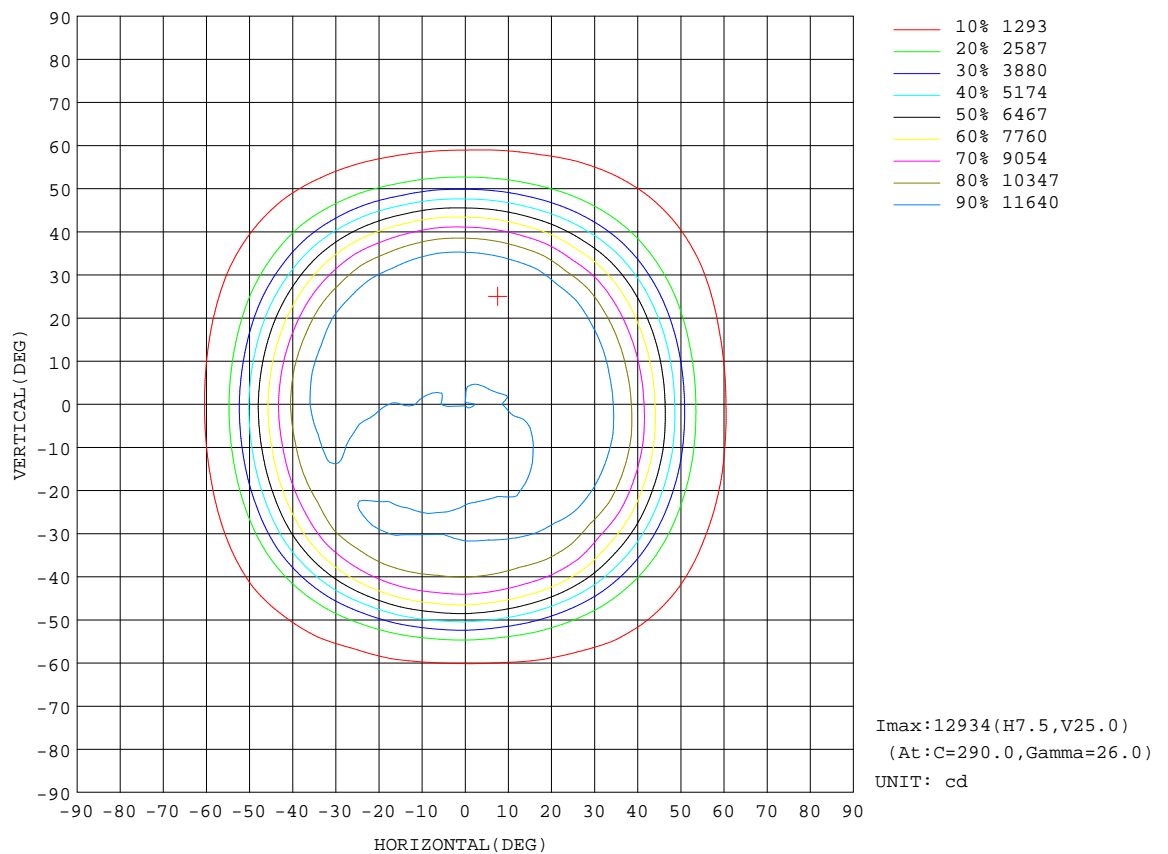


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

AAI Figure

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

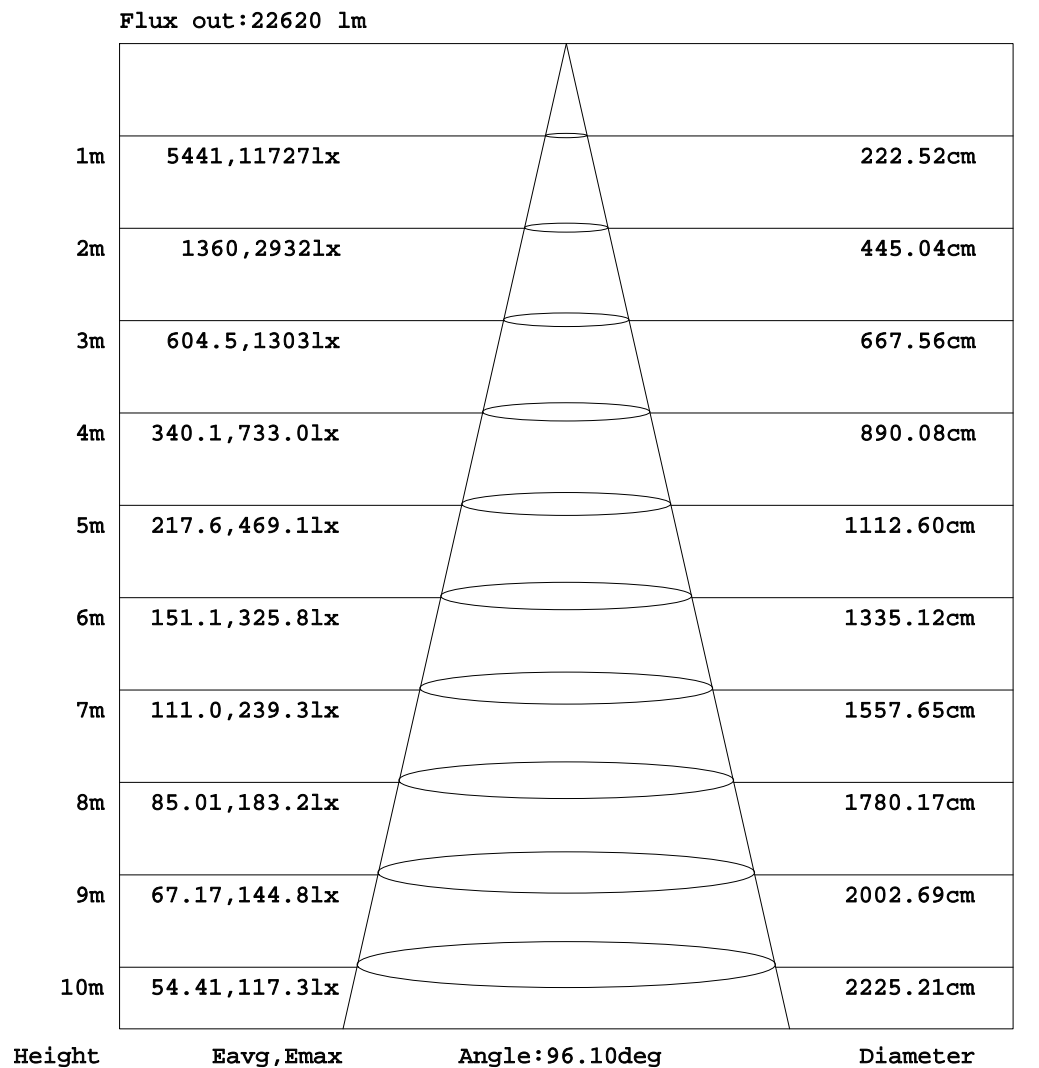


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

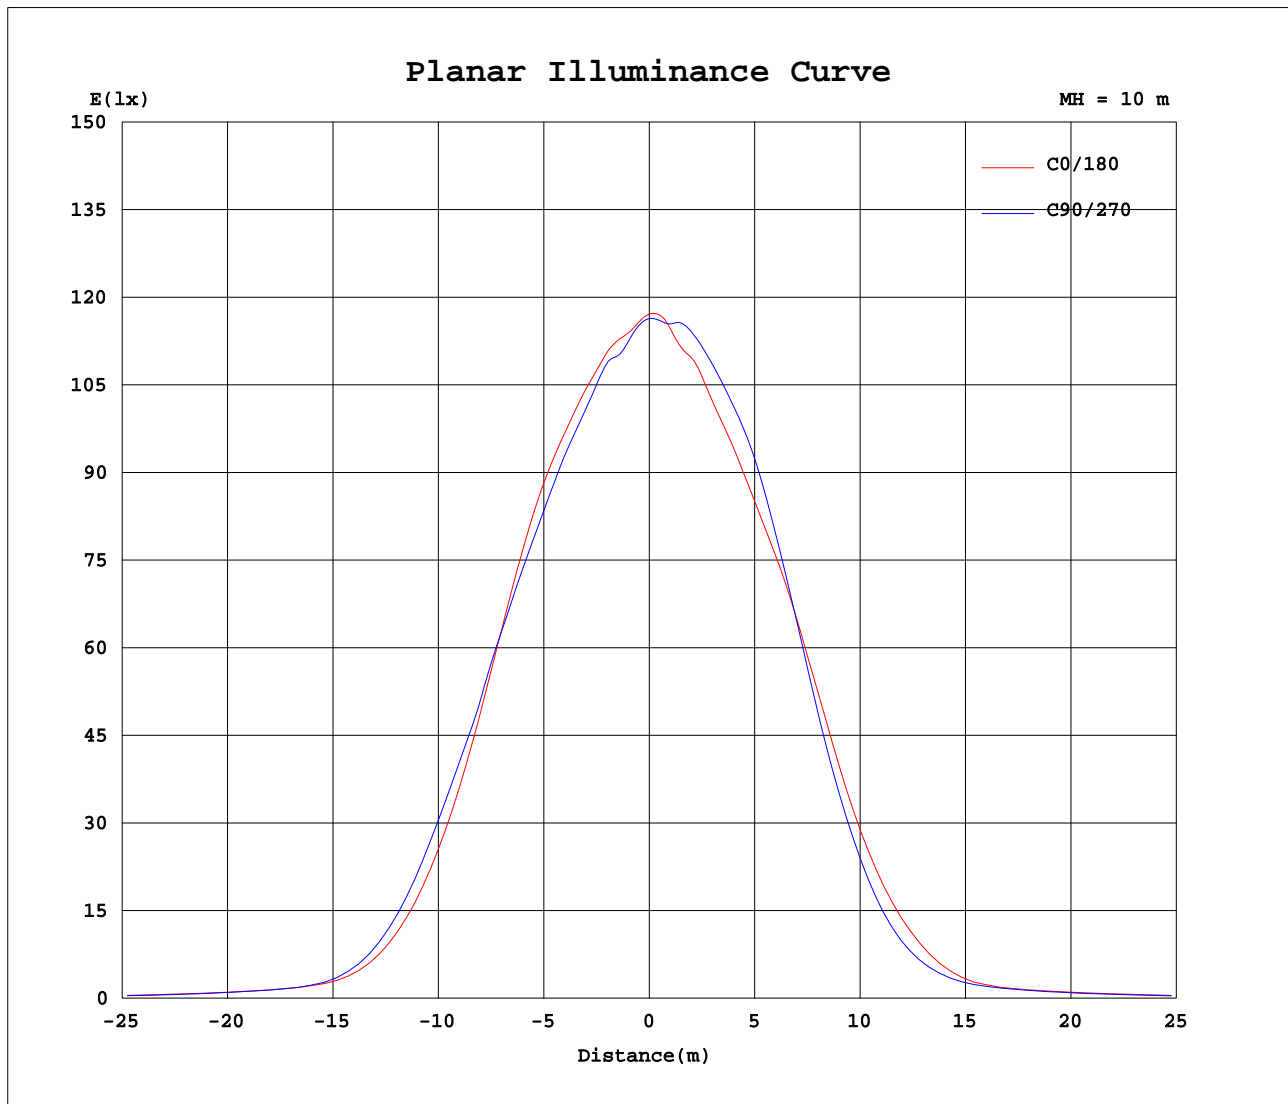

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

