


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.04 lm/W			
MODEL	100W 110DU	Imax(cd)	6467	S/MH(C0/180)	1.41
NOMINAL POWER(W)	100	LOR(%)	100.0	S/MH(C90/270)	1.35
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	13504	η UP,DN(C0-180)	0.0,50.5
NOMINAL FLUX(lm)	13500	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.1	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

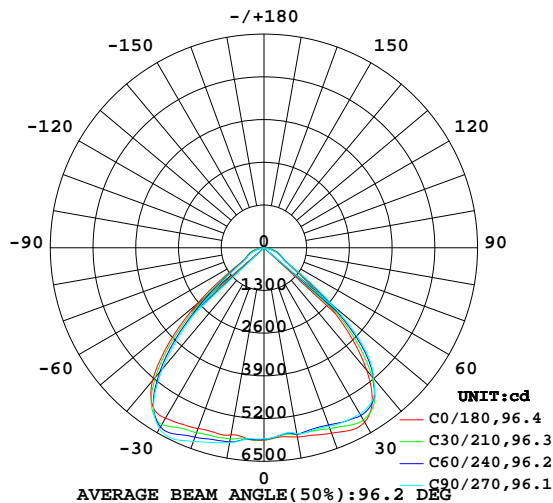

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

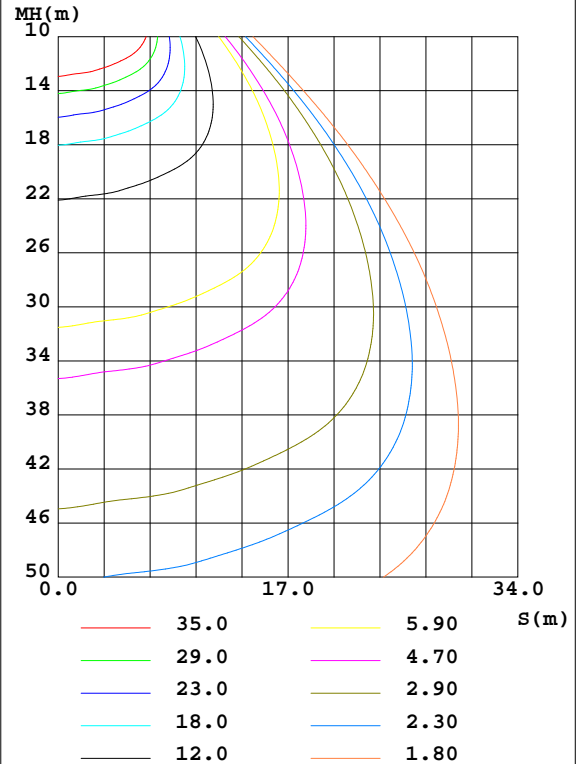

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5846	5757	5736	5706	5781	5959	6021	5940	0- 10	553.7	553.7	4.1,4.1
20	6004	5793	5780	5715	5854	6052	6271	6170	10- 20	1669	2223	16.5,16.5
30	6127	5965	5837	5815	5992	6295	6359	6287	20- 30	2799	5022	37.2,37.2
40	4862	5100	5188	5330	5282	5060	4804	4757	30- 40	3580	8602	63.7,63.7
50	2174	2486	2749	2853	2641	2224	1892	1985	40- 50	2917	11520	85.3,85.3
60	657.8	693.1	651.2	669.2	658.3	637.0	616.1	658.5	50- 60	1109	12628	93.5,93.5
70	447.9	434.3	362.3	429.5	446.2	426.3	358.2	446.1	60- 70	534.6	13163	97.5,97.5
80	177.3	118.8	57.93	120.0	174.6	116.7	55.96	127.9	70- 80	294.6	13458	99.7,99.7
90	1.762	2.918	16.01	3.149	2.137	4.068	17.35	3.243	80- 90	46.59	13504	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 10261 lm

%lum = 76.0%

%lamp = 76.0%

Conical surface Flux(120deg): 12628 lm

%lum = 93.5%


%lamp = 93.5%

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

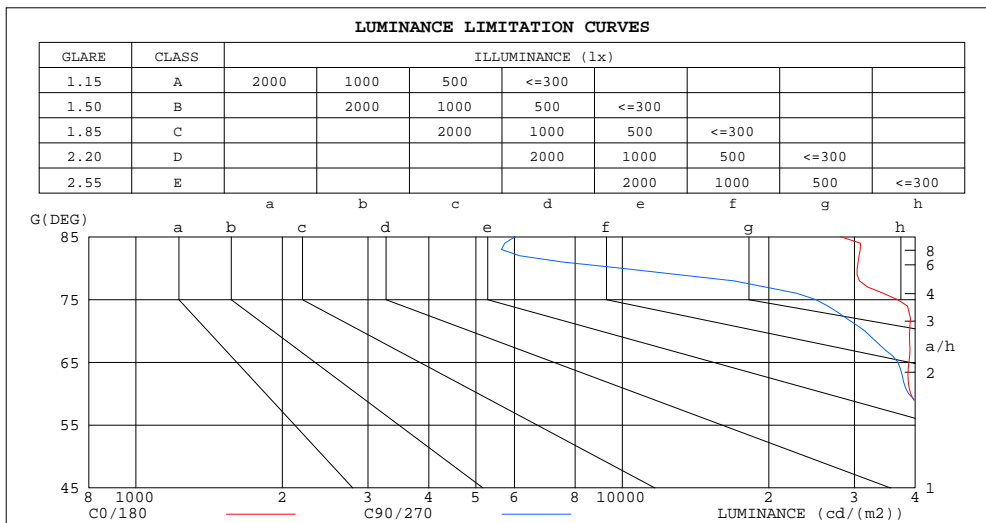

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	28135	6014
80	30396	9929
75	36748	24952
70	38972	31530
65	38812	36857
60	39156	38762
55	52309	63283
50	100677	127278
45	152028	181486

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.238	.135	.043	.231	.132	.042	.218	.125	.040	.206	.119	.038	.195	.113	.037		
2.0	.231	.127	.039	.225	.124	.038	.214	.119	.037	.204	.114	.036	.194	.110	.035		
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.196	.107	.033	.188	.104	.032		
4.0	.208	.108	.032	.204	.107	.031	.195	.103	.031	.187	.100	.030	.180	.098	.030		
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.171	.092	.028		
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026		
7.0	.176	.087	.025	.173	.086	.025	.167	.084	.024	.161	.082	.024	.156	.081	.024		
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022		
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.146	.073	.021	.141	.072	.021		
10.0	.150	.072	.020	.148	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.020		

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.175	.157	.140	.150	.135	.121	.103	.093	.083	.059	.054	.048	.019	.017	.016		
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.064	.056	.046	.037	.018	.015	.012		
3.0	.155	.114	.081	.133	.098	.071	.091	.068	.050	.053	.040	.029	.017	.013	.010		
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008		
5.0	.139	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006		
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005		
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004		
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004		
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003		
10.0	.111	.059	.024	.096	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED light					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:21cm*16cm					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					18.3	19.6	18.5	19.8	20.0	18.7	20.0	18.9	20.2	20.4
3H					18.6	19.8	18.9	20.0	20.2	18.8	20.0	19.1	20.2	20.4
4H					18.8	19.9	19.1	20.1	20.4	18.8	20.0	19.1	20.2	20.4
6H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.1	20.4
8H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.0	20.3
12H					18.9	19.9	19.3	20.2	20.5	18.7	19.7	19.0	20.0	20.2
4H 2H					18.3	19.4	18.6	19.6	19.9	18.6	19.7	18.9	20.0	20.2
3H					18.7	19.7	19.1	20.0	20.3	18.9	19.8	19.2	20.1	20.4
4H					19.1	19.9	19.4	20.2	20.6	19.0	19.9	19.3	20.2	20.5
6H					19.3	20.1	19.7	20.4	20.8	19.0	19.7	19.4	20.1	20.4
8H					19.4	20.1	19.8	20.5	20.8	18.9	19.6	19.3	20.0	20.4
12H					19.4	20.1	19.8	20.5	20.8	18.9	19.5	19.3	19.9	20.3
8H 4H					19.1	19.8	19.5	20.2	20.5	19.0	19.7	19.4	20.1	20.4
6H					19.4	20.0	19.9	20.4	20.8	19.0	19.6	19.4	20.0	20.4
8H					19.5	20.1	20.0	20.5	20.9	19.0	19.5	19.4	19.9	20.4
12H					19.6	20.1	20.1	20.5	21.0	18.9	19.4	19.4	19.8	20.3
12H 4H					19.0	19.7	19.5	20.1	20.5	19.0	19.6	19.4	20.0	20.4
6H					19.4	19.9	19.9	20.3	20.8	19.0	19.5	19.4	19.9	20.4
8H					19.5	20.0	20.0	20.4	20.9	19.0	19.4	19.4	19.8	20.3
Variations with the observer position at spacings:														
S = 1.0H					+ 1.4 / - 1.9					+ 1.9 / - 2.6				
1.5H					+ 1.1 / - 2.1					+ 1.2 / - 3.0				
2.0H					+ 3.2 / - 2.0					+ 4.0 / - 3.3				

CIE Pub.117, 13500 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 9.0)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	69	59	53	68	59	53	67	58	53	48
0.80	79	69	63	78	69	63	76	68	63	57
1.00	86	78	72	85	77	72	83	78	71	66
1.25	93	85	79	91	84	79	89	83	78	72
1.50	97	89	84	95	89	84	93	87	83	77
2.00	102	96	91	100	95	90	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	85
3.00	107	102	98	105	101	97	102	98	95	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	104	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

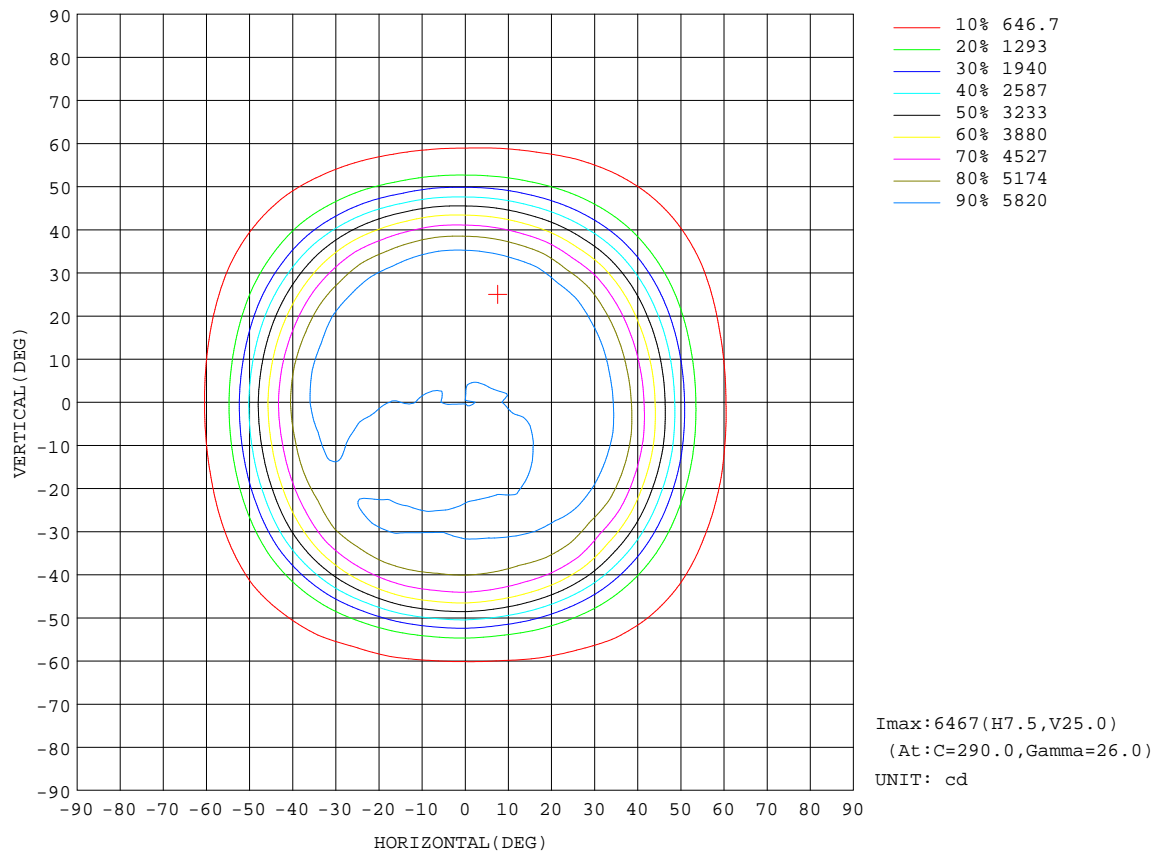


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

AAI Figure

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

Flux out:11310 lm

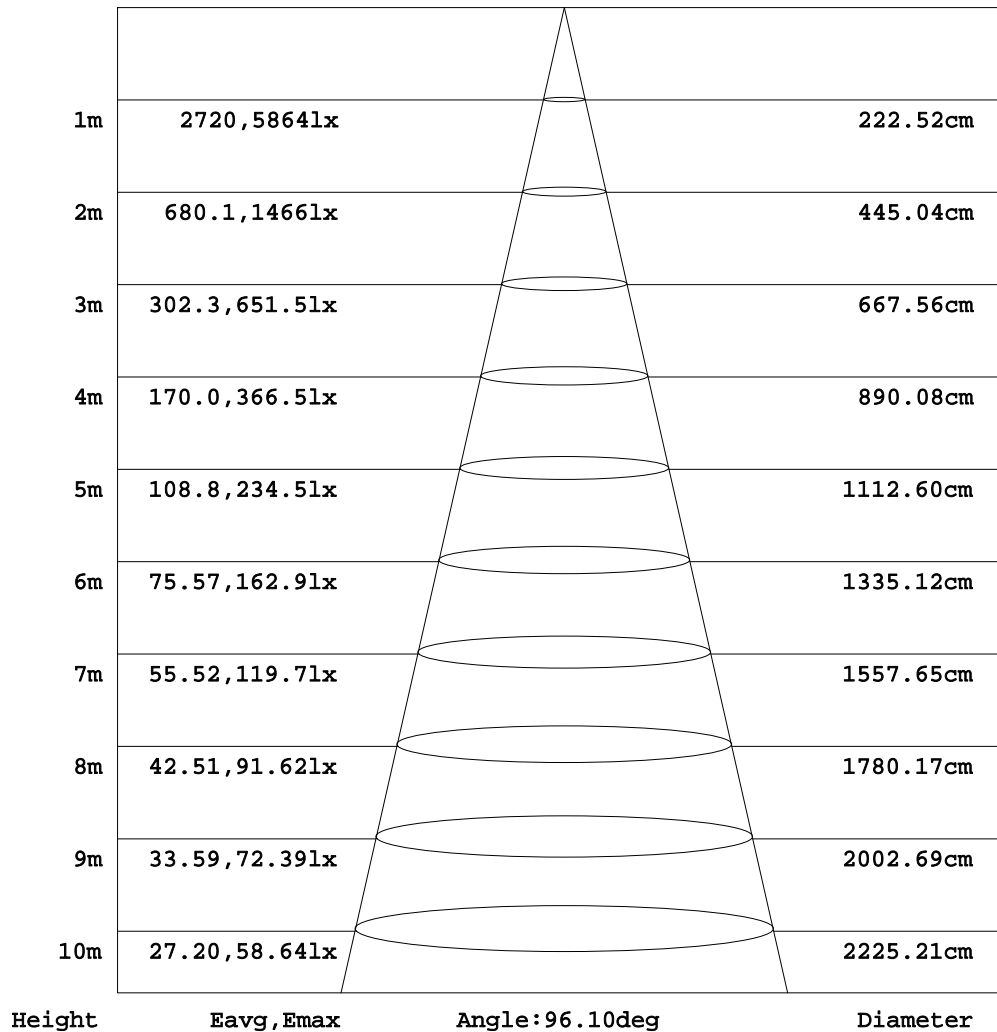


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

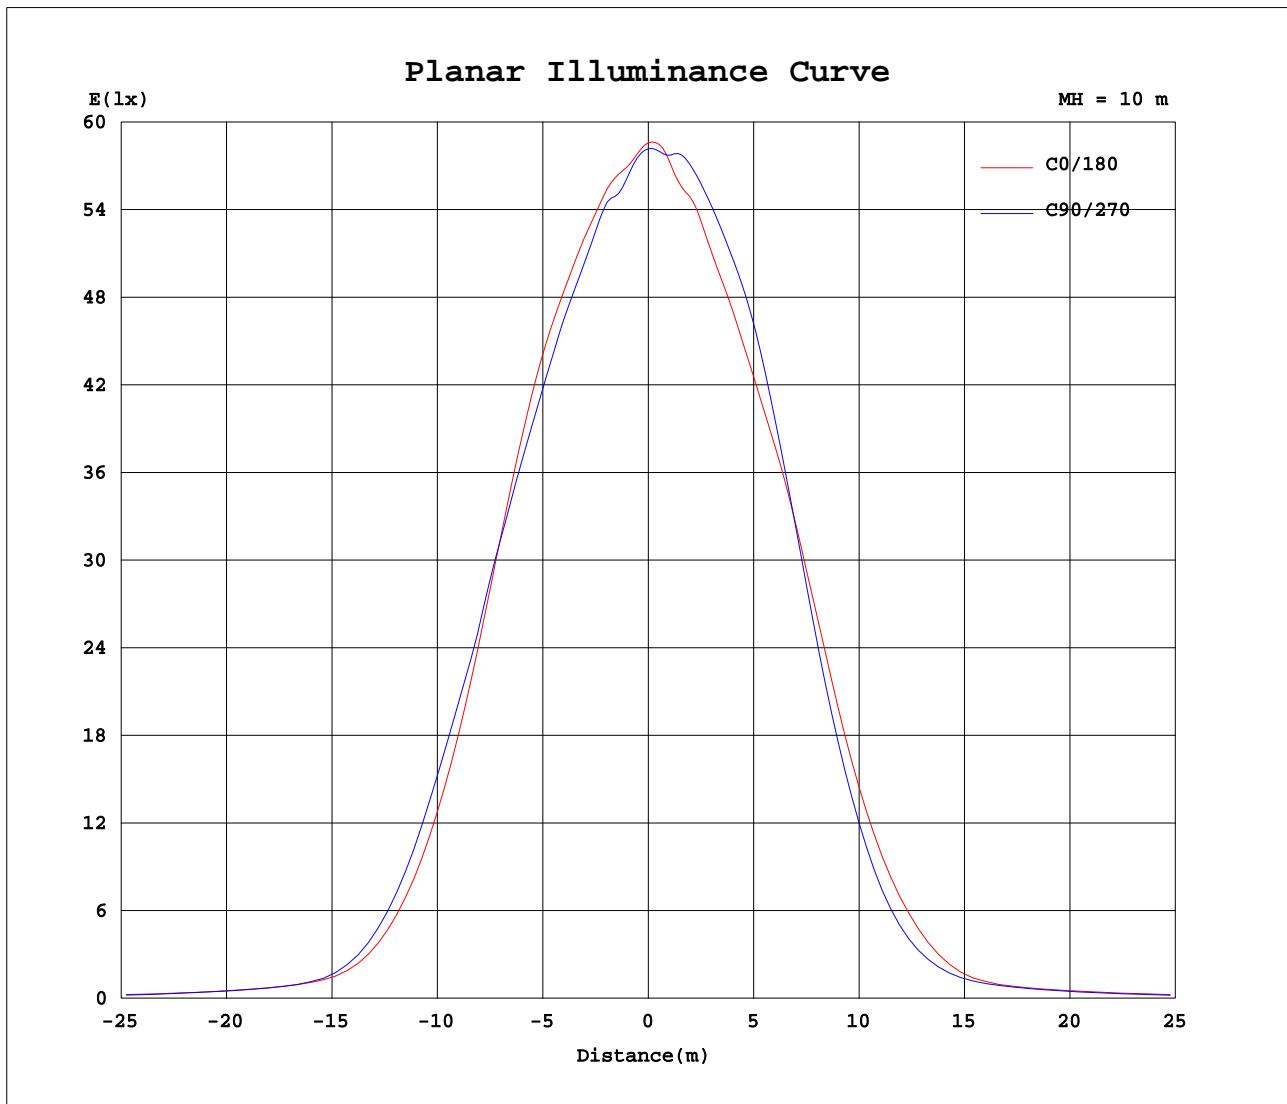

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

