


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 130.04 lm/W
MODEL	120W 110DU	Imax(cd)	7474	S/MH(C0/180)	1.41	
NOMINAL POWER(W)	120	LOR(%)	100.0	S/MH(C90/270)	1.35	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	15605	η UP,DN(C0-180)	0.0,50.5	
NOMINAL FLUX(lm)	15600	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220.1	η down(%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

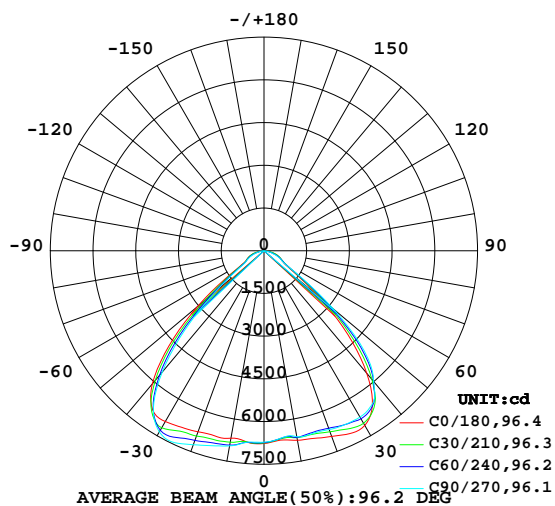

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

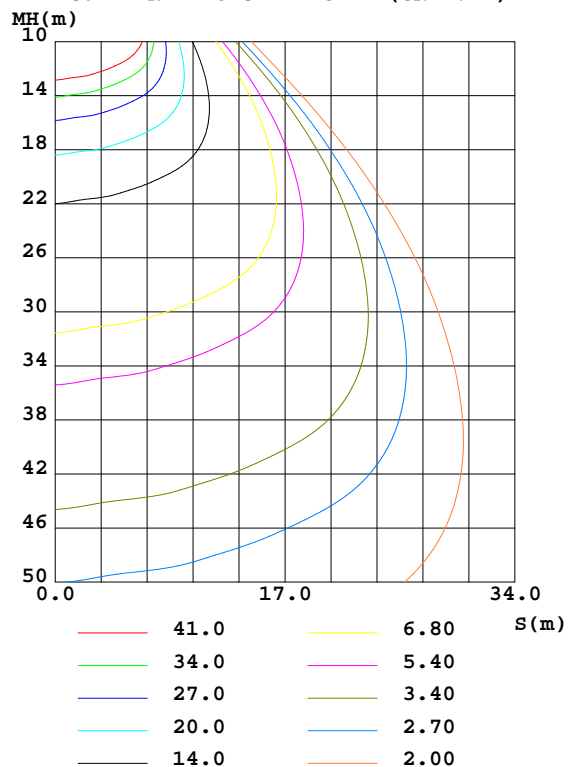

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6756	6653	6629	6594	6680	6886	6957	6864	0- 10	639.8	639.8	4.1,4.1
20	6938	6694	6679	6604	6764	6994	7246	7130	10- 20	1929	2569	16.5,16.5
30	7080	6893	6745	6720	6924	7274	7349	7265	20- 30	3235	5804	37.2,37.2
40	5618	5893	5995	6159	6103	5847	5551	5497	30- 40	4137	9940	63.7,63.7
50	2513	2872	3177	3297	3052	2570	2186	2294	40- 50	3371	13312	85.3,85.3
60	760.2	800.9	752.5	773.3	760.7	736.1	711.9	761.0	50- 60	1281	14593	93.5,93.5
70	517.5	501.8	418.7	496.3	515.7	492.7	414.0	515.5	60- 70	617.8	15211	97.5,97.5
80	204.9	137.2	66.94	138.7	201.8	134.8	64.67	147.8	70- 80	340.4	15551	99.7,99.7
90	2.036	3.372	18.50	3.639	2.470	4.701	20.05	3.748	80- 90	53.84	15605	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 11858 lm

%lum = 76.0%

%lamp = 76.0%

Conical surface Flux(120deg): 14593 lm

%lum = 93.5%


%lamp = 93.5%

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

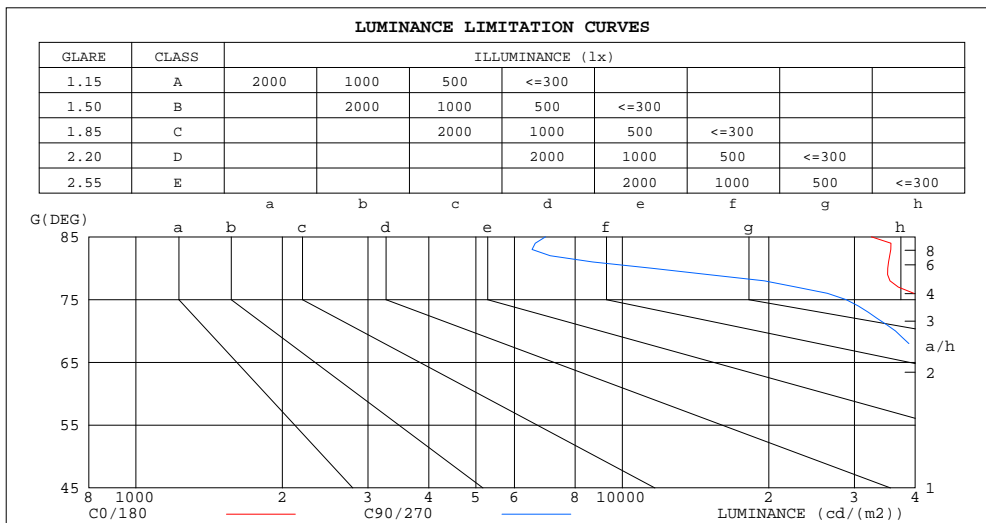

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	32512	6949
80	35124	11474
75	42464	28834
70	45034	36435
65	44850	42590
60	45247	44792
55	60446	73127
50	116337	147077
45	175676	209718

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.238	.135	.043	.231	.132	.042	.218	.125	.040	.206	.119	.038	.195	.113	.037		
2.0	.231	.127	.039	.225	.124	.038	.214	.119	.037	.204	.114	.036	.194	.110	.035		
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.196	.107	.033	.188	.104	.032		
4.0	.208	.108	.032	.204	.107	.031	.195	.103	.031	.187	.100	.030	.180	.098	.030		
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.171	.092	.028		
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026		
7.0	.176	.087	.025	.173	.086	.025	.167	.084	.024	.161	.082	.024	.156	.081	.024		
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022		
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.146	.073	.021	.141	.072	.021		
10.0	.150	.072	.020	.148	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.020		

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.175	.157	.140	.150	.135	.121	.103	.093	.083	.059	.054	.048	.019	.017	.016		
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.064	.056	.046	.037	.018	.015	.012		
3.0	.155	.114	.081	.133	.098	.071	.091	.068	.050	.053	.040	.029	.017	.013	.010		
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008		
5.0	.139	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006		
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005		
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004		
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004		
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003		
10.0	.111	.059	.024	.096	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED light					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:21cm*16cm					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					18.3	19.6	18.5	19.8	20.0	18.7	20.0	18.9	20.2	20.4
3H					18.6	19.8	18.9	20.0	20.2	18.8	20.0	19.1	20.2	20.4
4H					18.8	19.9	19.1	20.1	20.4	18.8	20.0	19.1	20.2	20.4
6H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.1	20.4
8H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.0	20.3
12H					18.9	19.9	19.3	20.2	20.5	18.7	19.7	19.0	20.0	20.2
4H 2H					18.3	19.4	18.6	19.6	19.9	18.6	19.7	18.9	20.0	20.2
3H					18.7	19.7	19.1	20.0	20.3	18.9	19.8	19.2	20.1	20.4
4H					19.1	19.9	19.4	20.2	20.6	19.0	19.9	19.3	20.2	20.5
6H					19.3	20.1	19.7	20.4	20.8	19.0	19.7	19.4	20.1	20.4
8H					19.4	20.1	19.8	20.5	20.8	18.9	19.6	19.3	20.0	20.4
12H					19.4	20.1	19.8	20.5	20.8	18.9	19.5	19.3	19.9	20.3
8H 4H					19.1	19.8	19.5	20.2	20.5	19.0	19.7	19.4	20.1	20.4
6H					19.4	20.0	19.9	20.4	20.8	19.0	19.6	19.4	20.0	20.4
8H					19.5	20.1	20.0	20.5	20.9	19.0	19.5	19.4	19.9	20.4
12H					19.6	20.1	20.1	20.5	21.0	18.9	19.4	19.4	19.8	20.3
12H 4H					19.0	19.7	19.5	20.1	20.5	19.0	19.6	19.4	20.0	20.4
6H					19.4	19.9	19.9	20.3	20.8	19.0	19.5	19.4	19.9	20.4
8H					19.5	20.0	20.0	20.4	20.9	19.0	19.4	19.4	19.8	20.3
Variations with the observer position at spacings:														
S = 1.0H					+ 1.4 / - 1.9					+ 1.9 / - 2.6				
1.5H					+ 1.1 / - 2.1					+ 1.2 / - 3.0				
2.0H					+ 3.2 / - 2.0					+ 4.0 / - 3.3				

CIE Pub.117, 15600 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 9.5)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	69	59	53	68	59	53	67	58	53	48
0.80	79	69	63	78	69	63	76	68	63	57
1.00	86	78	72	85	77	72	83	78	71	66
1.25	93	85	79	91	84	79	89	83	78	72
1.50	97	89	84	95	89	84	93	87	83	77
2.00	102	96	91	100	95	90	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	85
3.00	107	102	98	105	101	97	102	98	95	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	104	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

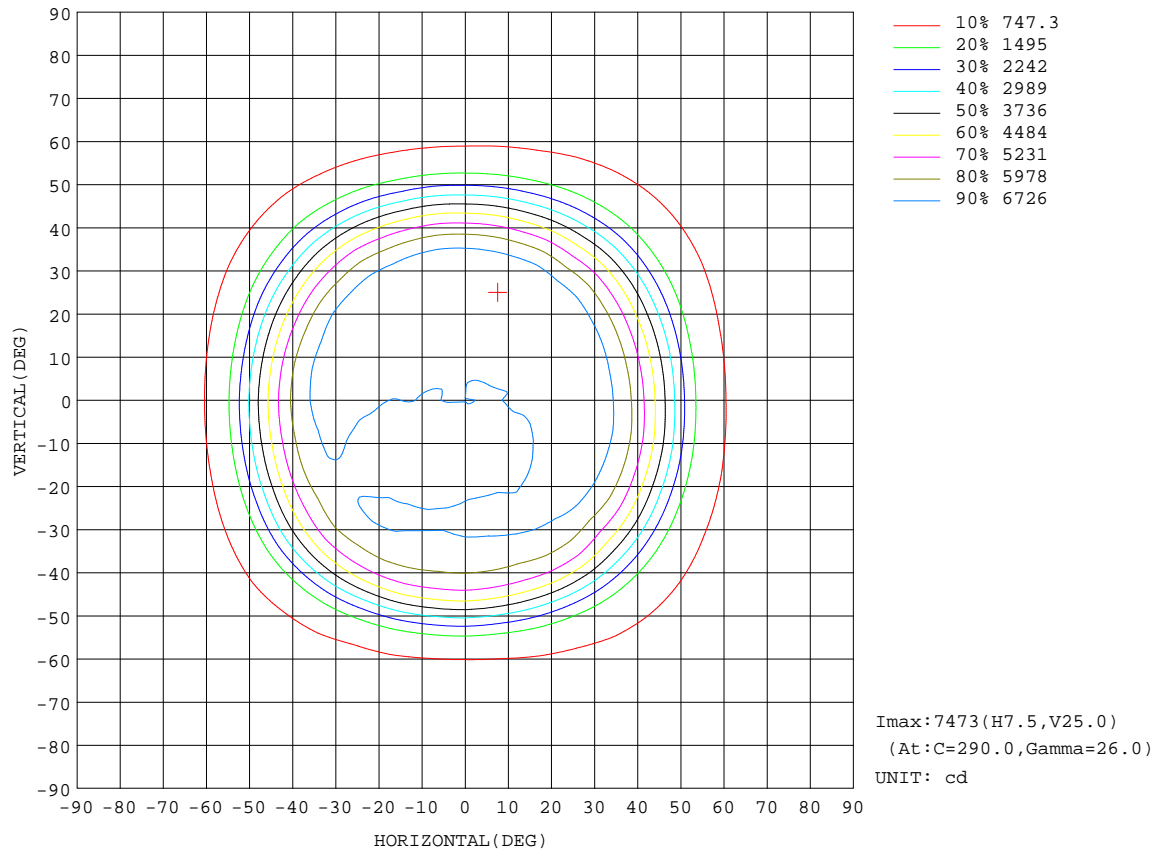


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

AAI Figure

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

Flux out:13069 lm

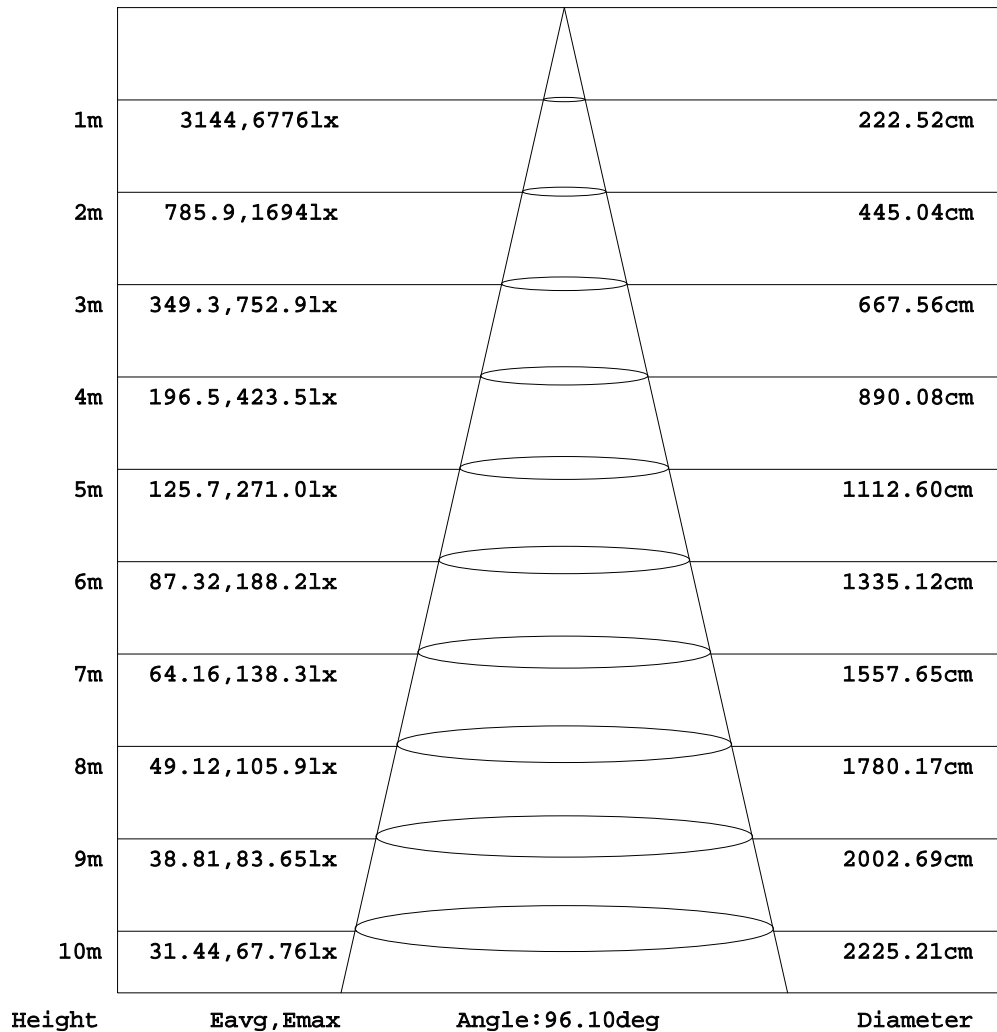


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

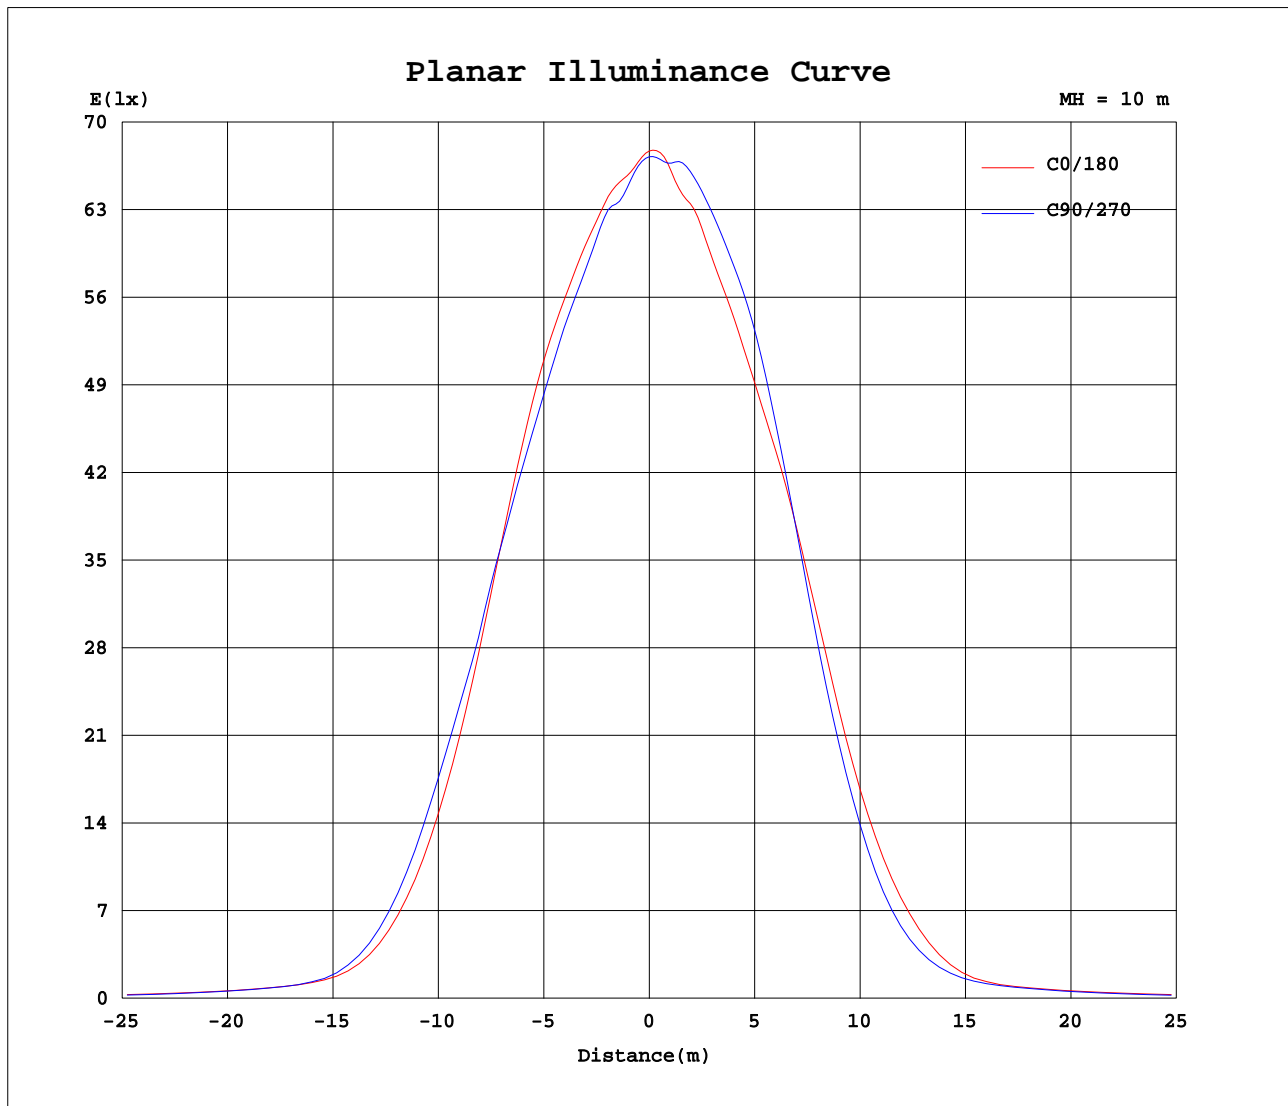

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

