


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 140.04 lm/W
MODEL	120W 110DU	Imax(cd)	8048	S/MH(C0/180)	1.41	
NOMINAL POWER(W)	120	LOR(%)	100.0	S/MH(C90/270)	1.35	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	16805	η UP,DN(C0-180)	0.0,50.5	
NOMINAL FLUX(lm)	16800	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220.1	η down(%)	100.0	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

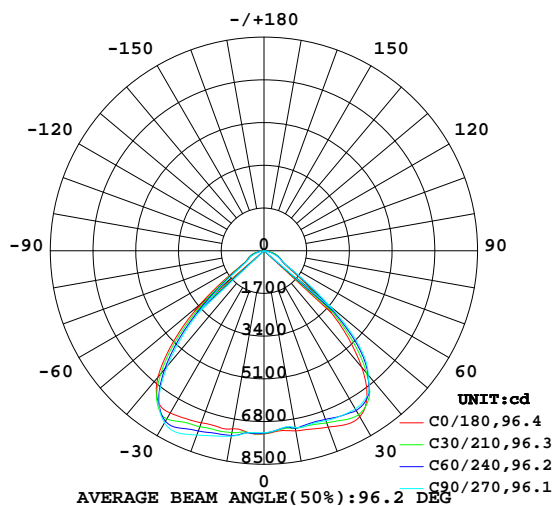

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

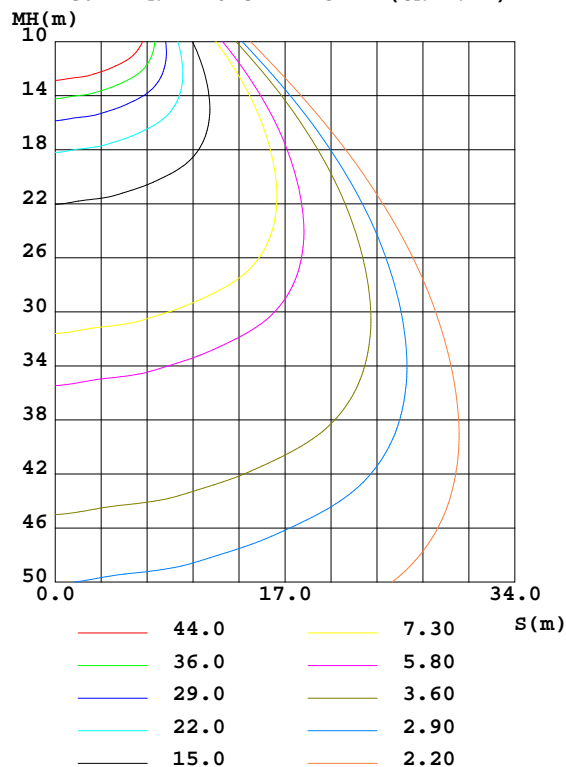

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	7276	7165	7139	7101	7194	7415	7492	7392	0- 10	689.1	689.1	4.1,4.1
20	7472	7209	7193	7112	7285	7532	7803	7678	10- 20	2077	2766	16.5,16.5
30	7625	7423	7264	7237	7457	7833	7914	7824	20- 30	3484	6250	37.2,37.2
40	6050	6347	6456	6632	6573	6296	5978	5920	30- 40	4455	10705	63.7,63.7
50	2706	3093	3421	3551	3286	2767	2354	2470	40- 50	3631	14336	85.3,85.3
60	818.6	862.5	810.4	832.8	819.2	792.7	766.7	819.5	50- 60	1380	15715	93.5,93.5
70	557.3	540.4	450.9	534.5	555.3	530.5	445.8	555.1	60- 70	665.3	16381	97.5,97.5
80	220.7	147.8	72.09	149.4	217.3	145.2	69.64	159.1	70- 80	366.6	16747	99.7,99.7
90	2.193	3.632	19.92	3.919	2.660	5.062	21.59	4.036	80- 90	57.98	16805	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 12770 lm

%lum = 76.0%

%lamp = 76.0%

Conical surface Flux(120deg): 15715 lm

%lum = 93.5%


%lamp = 93.5%

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.480m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

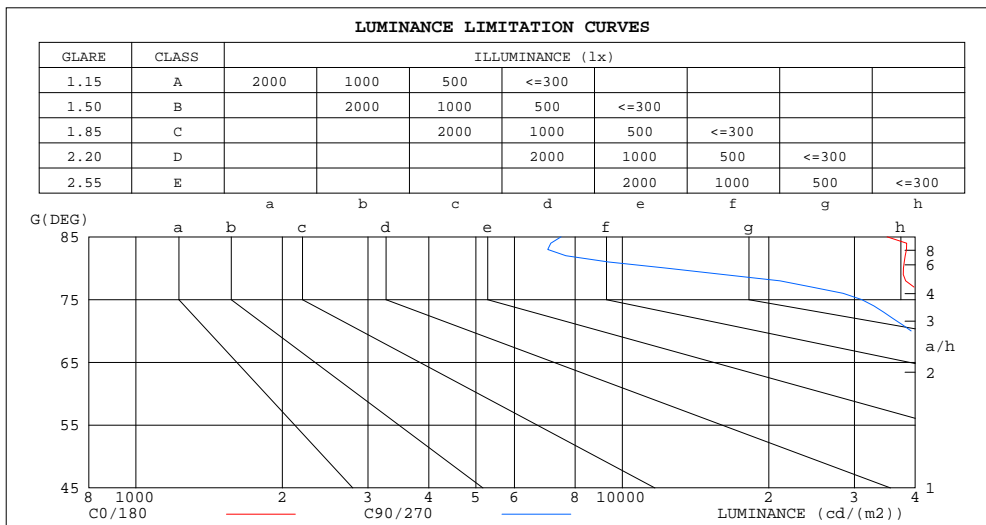

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	35013	7484
80	37826	12356
75	45731	31052
70	48498	39238
65	48300	45866
60	48728	48238
55	65096	78752
50	125286	158390
45	189190	225850

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.238	.135	.043	.231	.132	.042	.218	.125	.040	.206	.119	.038	.195	.113	.037		
2.0	.231	.127	.039	.225	.124	.038	.214	.119	.037	.204	.114	.036	.194	.110	.035		
3.0	.220	.117	.035	.215	.115	.035	.205	.111	.034	.196	.107	.033	.188	.104	.032		
4.0	.208	.108	.032	.204	.107	.031	.195	.103	.031	.187	.100	.030	.180	.098	.030		
5.0	.197	.100	.029	.193	.099	.029	.185	.096	.028	.178	.094	.028	.171	.092	.028		
6.0	.186	.093	.027	.182	.092	.026	.175	.090	.026	.169	.088	.026	.163	.086	.026		
7.0	.176	.087	.025	.173	.086	.025	.167	.084	.024	.161	.082	.024	.156	.081	.024		
8.0	.167	.081	.023	.164	.081	.023	.158	.079	.023	.153	.078	.022	.148	.076	.022		
9.0	.158	.076	.021	.155	.076	.021	.150	.074	.021	.146	.073	.021	.141	.072	.021		
10.0	.150	.072	.020	.148	.071	.020	.143	.070	.020	.139	.069	.020	.135	.068	.020		

ρcc	80%			70%			50%			30%			10%			0	
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.175	.157	.140	.150	.135	.121	.103	.093	.083	.059	.054	.048	.019	.017	.016		
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.064	.056	.046	.037	.018	.015	.012		
3.0	.155	.114	.081	.133	.098	.071	.091	.068	.050	.053	.040	.029	.017	.013	.010		
4.0	.147	.100	.064	.126	.086	.056	.087	.060	.039	.050	.035	.023	.016	.011	.008		
5.0	.139	.089	.052	.120	.077	.045	.083	.054	.032	.048	.032	.019	.015	.010	.006		
6.0	.133	.081	.043	.114	.070	.038	.079	.049	.027	.046	.029	.016	.015	.009	.005		
7.0	.127	.074	.036	.109	.064	.032	.075	.045	.022	.044	.026	.013	.014	.009	.004		
8.0	.121	.068	.031	.104	.059	.027	.072	.041	.019	.042	.024	.011	.014	.008	.004		
9.0	.116	.063	.027	.100	.055	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003		
10.0	.111	.059	.024	.096	.051	.021	.066	.036	.015	.039	.021	.009	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: LED light					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:					SUR.:21cm*16cm					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					18.3	19.6	18.5	19.8	20.0	18.7	20.0	18.9	20.2	20.4
3H					18.6	19.8	18.9	20.0	20.2	18.8	20.0	19.1	20.2	20.4
4H					18.8	19.9	19.1	20.1	20.4	18.8	20.0	19.1	20.2	20.4
6H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.1	20.4
8H					18.9	19.9	19.2	20.2	20.5	18.8	19.8	19.1	20.0	20.3
12H					18.9	19.9	19.3	20.2	20.5	18.7	19.7	19.0	20.0	20.2
4H 2H					18.3	19.4	18.6	19.6	19.9	18.6	19.7	18.9	20.0	20.2
3H					18.7	19.7	19.1	20.0	20.3	18.9	19.8	19.2	20.1	20.4
4H					19.1	19.9	19.4	20.2	20.6	19.0	19.9	19.3	20.2	20.5
6H					19.3	20.1	19.7	20.4	20.8	19.0	19.7	19.4	20.1	20.4
8H					19.4	20.1	19.8	20.5	20.8	18.9	19.6	19.3	20.0	20.4
12H					19.4	20.1	19.8	20.5	20.8	18.9	19.5	19.3	19.9	20.3
8H 4H					19.1	19.8	19.5	20.2	20.5	19.0	19.7	19.4	20.1	20.4
6H					19.4	20.0	19.9	20.4	20.8	19.0	19.6	19.4	20.0	20.4
8H					19.5	20.1	20.0	20.5	20.9	19.0	19.5	19.4	19.9	20.4
12H					19.6	20.1	20.1	20.5	21.0	18.9	19.4	19.4	19.8	20.3
12H 4H					19.0	19.7	19.5	20.1	20.5	19.0	19.6	19.4	20.0	20.4
6H					19.4	19.9	19.9	20.3	20.8	19.0	19.5	19.4	19.9	20.4
8H					19.5	20.0	20.0	20.4	20.9	19.0	19.4	19.4	19.8	20.3
Variations with the observer position at spacings:														
S = 1.0H					+ 1.4 / - 1.9					+ 1.9 / - 2.6				
1.5H					+ 1.1 / - 2.1					+ 1.2 / - 3.0				
2.0H					+ 3.2 / - 2.0					+ 4.0 / - 3.3				

CIE Pub.117, 16800 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 9.8)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	69	59	53	68	59	53	67	58	53	48
0.80	79	69	63	78	69	63	76	68	63	57
1.00	86	78	72	85	77	72	83	78	71	66
1.25	93	85	79	91	84	79	89	83	78	72
1.50	97	89	84	95	89	84	93	87	83	77
2.00	102	96	91	100	95	90	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	85
3.00	107	102	98	105	101	97	102	98	95	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	104	105	103	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004										
Suspended										
SHRNM = 1.25										

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

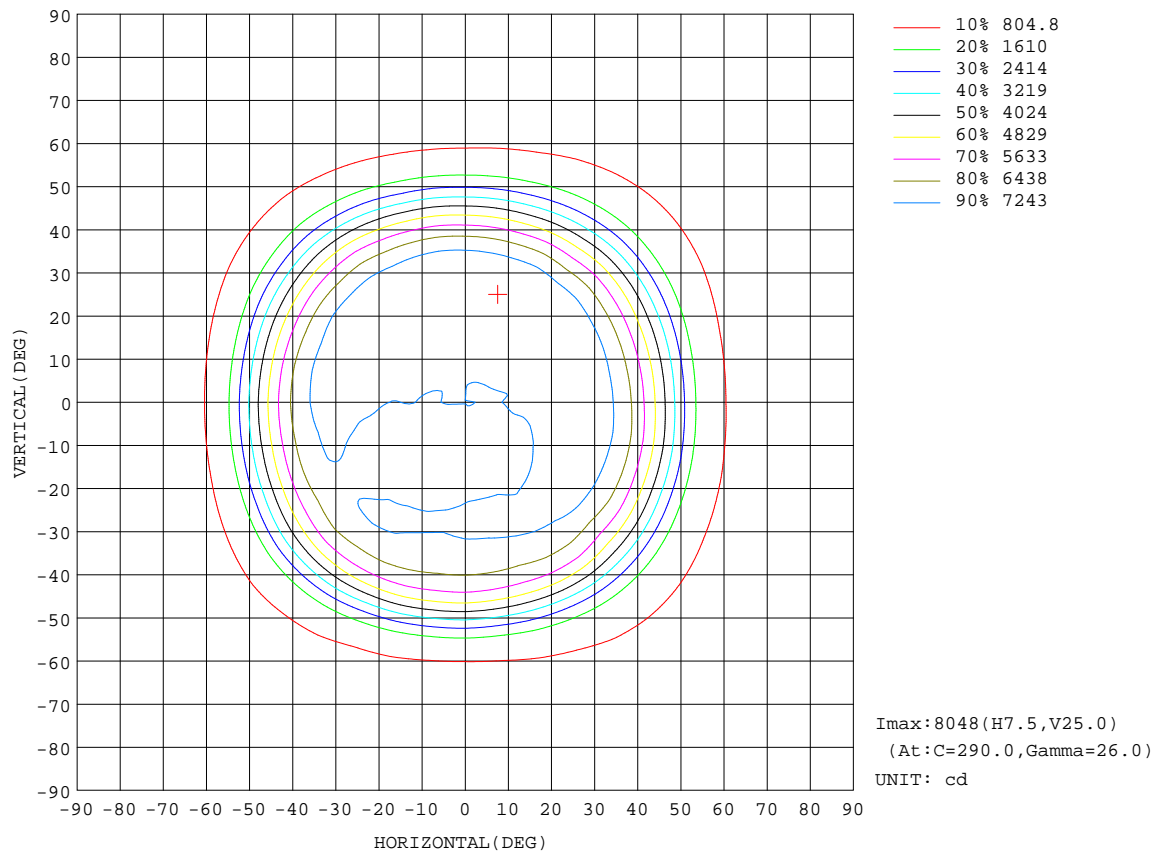


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

AAI Figure

NAME: LED light	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:21cm*16cm	Shielding Angle:

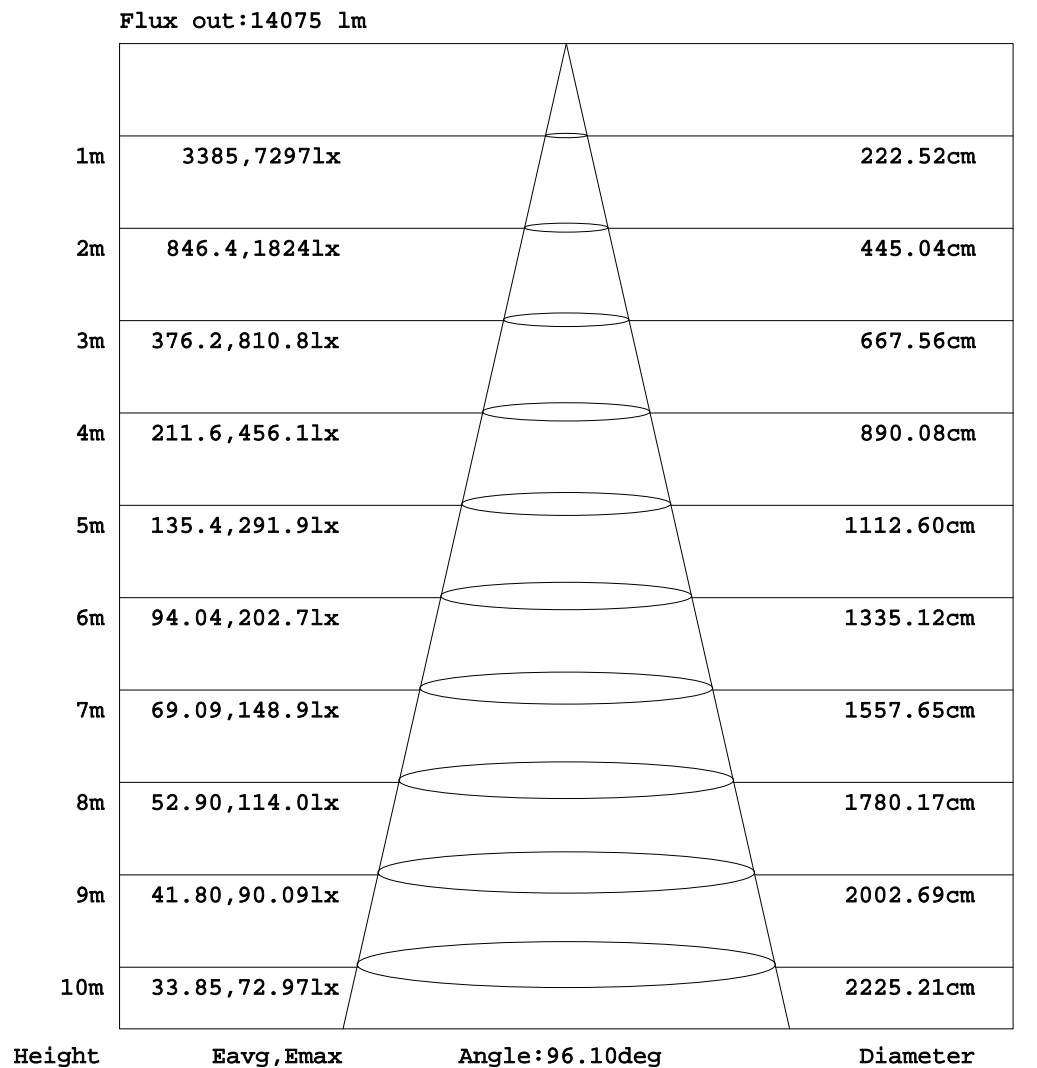


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2017.4.26

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

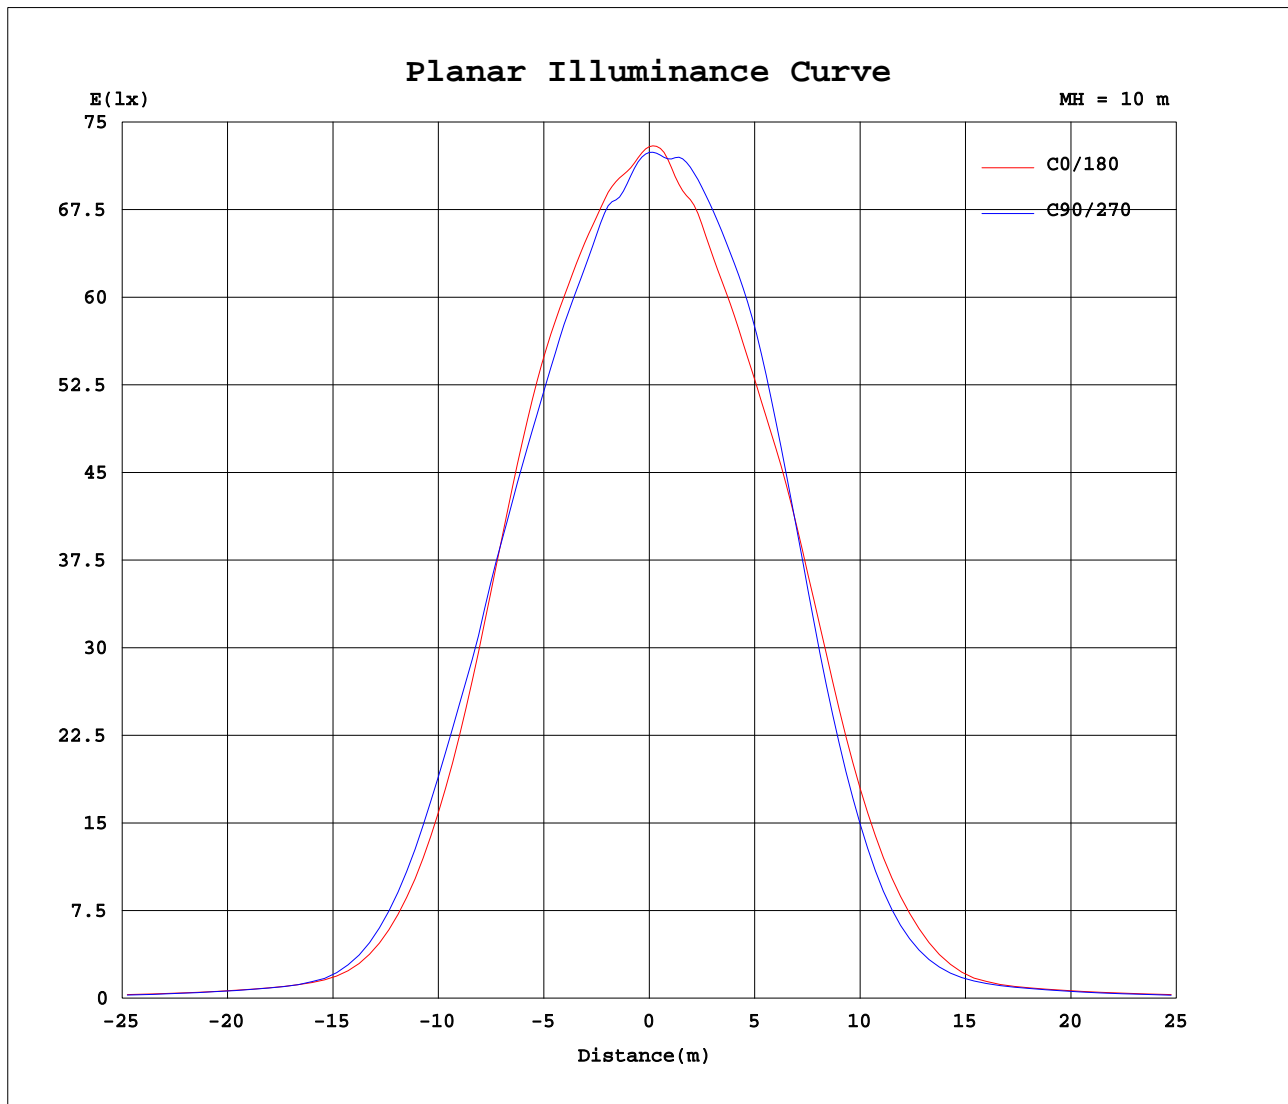

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2017.4.26

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.480m [K=1.0000]
Remarks:

